LEATHER PATTERN PACK No. 7

AIRTAG KEY FOB

Folded pouch with window, snap flap and key ring loop

Finished size	1 3/4 x 2 in closed, ring loop about 1 1/4 in
Leather	3-4 oz (1.2-1.6 mm) vegetable-tanned
Holds	One Apple AirTag, 31.9 mm diameter x 8.0 mm thick
Skill level	Intermediate
Paper	US Letter or A4, printed at 100%

INSIDE THIS PACK

- Materials, tools and print check (page 2)
- True-size pattern pages with stitch holes marked
- Step-by-step assembly instructions with diagram
- Pattern terms

Build guide with photos and video: marcellinony.com/leather-airtag-key-fob-pattern/

Materials, Tools and Print Check

AirTag Key Fob | 3-4 oz (1.2-1.6 mm) vegetable-tanned

MATERIALS

- Leather: body 3-4 oz vegetable-tanned, 1 3/4 x 4 15/16 in; loop strap 1/2 x 3 1/2 in. A 5 x 6 in scrap covers both.
- Hardware: one Line 20 or Line 24 snap (cap, socket, stud, post), one split ring or key ring about 1 in.
- Thread: 0.8 mm waxed thread, 20 in. Glue and edge dye (optional); a 1 in disc of 2 oz leather to back the stud.
- Apple AirTag. Do not store the tag in the pouch while stitching.


TOOLS

- Diamond stitching chisel, 3 mm pitch (2-prong)
- Round punch for the window (1 in, or draw and cut with a sharp knife) and a hole punch for the snap post
- Snap setter and mallet
- Two harness needles
- Knife, steel ruler, cutting mat, slicker, edge beveler, sandpaper

WHERE THE DIMENSIONS COME FROM

- Apple lists the AirTag at 31.9 mm in diameter, 8.0 mm high, 11 g. support.apple.com/en-kz/111847
- Pocket inside width: 1 3/4 in minus 1/8 in stitch margins each side = 1 1/2 in (38 mm), against a 1.256 in (31.9 mm) tag.
- Window is 0.95 in across, smaller than the tag, so the tag cannot pass through the front. The back is solid.
- Construction (folded pouch, side seams, snap flap, strap loop in the seam) is a Marcellino NY design. Cut a paper version first and test with your tag.


PRINT CHECK (print every page at 100% / Actual Size)

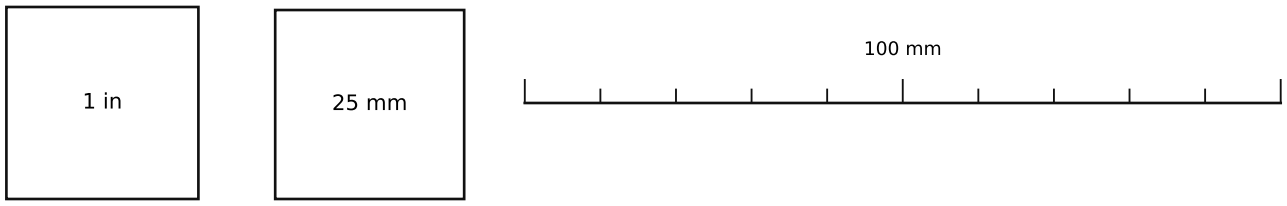


Measure the squares and the bar with a ruler before cutting anything. They must read 1 in, 25 mm and 100 mm. If they do not, switch off 'Fit to page' or 'Shrink to fit' in the print dialog and print again. Printer margins vary; keep pattern pieces inside the printed area. Content on every page sits within 0.5 in of the edge of Letter paper.

7 AirTag Key Fob

Cut 1 body, 3-4 oz, plus a loop strap. Fold at the fold line, stitch both sides, set the snap.

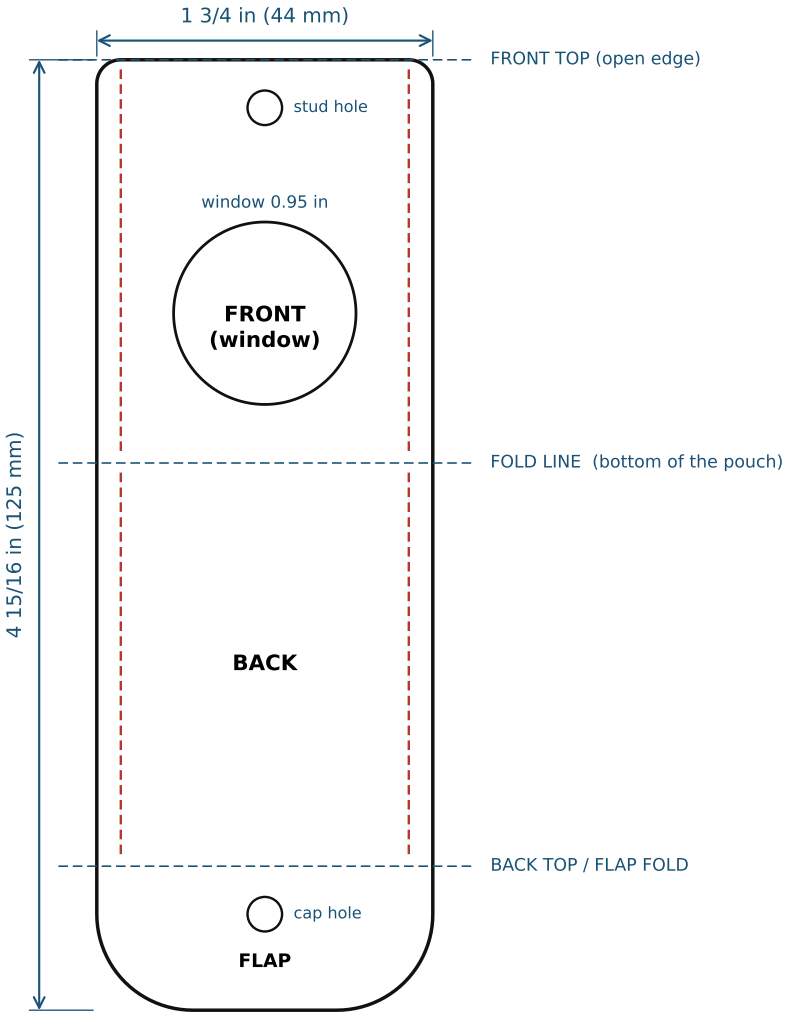

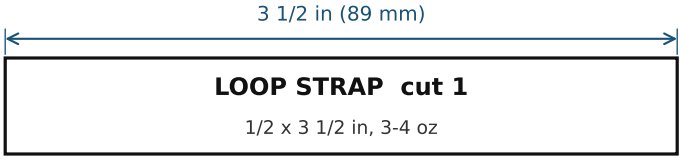

SPECIFICATIONS

Fits

Apple AirTag: 31.9 mm diameter, 8.0 mm thick.

Window

0.95 in, centered 0.78 in above the fold line. Smaller than the tag.

Stitch line

1/8 in from each side edge, fold to opening. 3 mm chisel.

Snap


Stud 1/4 in from the front top; cap 1/2 in from the flap tip. Back the stud with a 1 in disc of 2 oz leather.

Loop

Fold the strap in half; ends 1/2 in into the left seam, 1/2 in below the opening.

Finished


1 3/4 x 2 in, ring loop about 1 1/4 in.

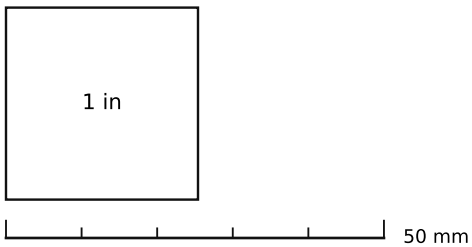

SCALE CHECK: the square must measure 1 in and the bar 50 mm. If not, reprint at 'Actual size'.

Assembly Diagram

AirTag Key Fob

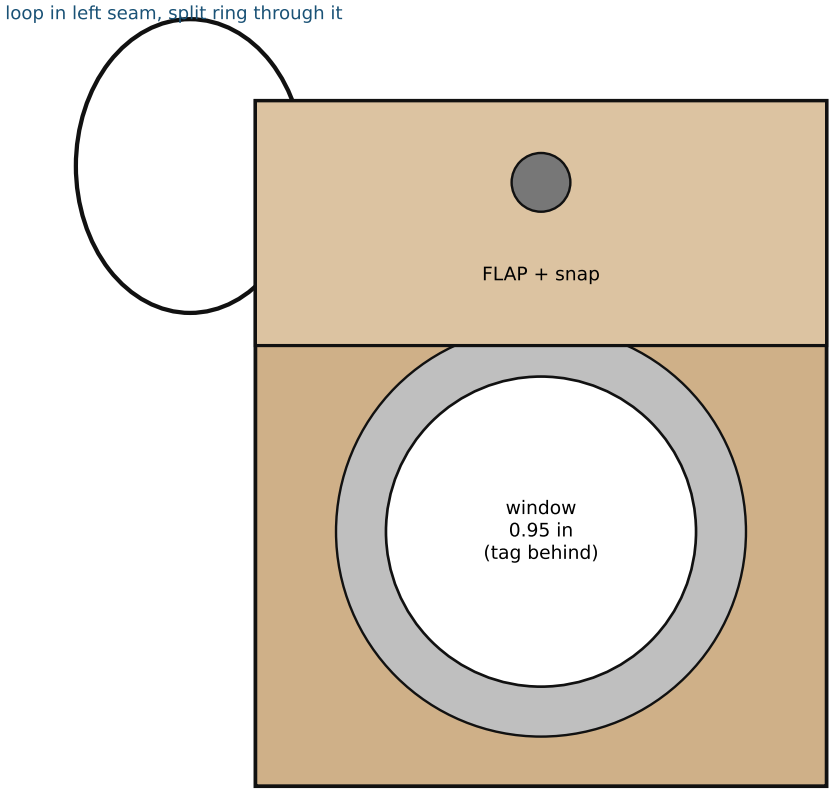

Closed pouch, front view, enlarged (not to scale). Tag sits at the bottom behind the window; the flap snaps over the top.

Assembly Instructions

AirTag Key Fob

1. Print every page at 100%. Confirm the scale square on page 2. Cut a paper copy of the body, fold it at the fold line and slide the tag in.
2. Cut the body 1 3/4 x 4 15/16 in with the rounded flap tip. Cut the 0.95 in window in the front panel, centered 0.78 in above the fold line. Cut the loop strap 1/2 x 3 1/2 in.
3. Punch the snap post holes: the stud hole on the front panel 1/4 in from its top edge, the cap hole on the flap 1/2 in from its tip. Test on scrap for the hole size your snap needs.
4. Bevel and burnish the front panel's top edge, the flap edges and the window edge. These cannot be reached later.
5. Set the cap and socket on the flap. Set the stud on the front panel, backing it with a 1 in disc of 2 oz leather glued inside so the post does not press on the tag.
6. Fold the body at the fold line, grain side out, front over back. Glue the side margins only.
7. Fold the loop strap in half, ends together, and insert the ends 1/2 in into the left seam, 1/2 in below the opening. The loop sits outside the left edge.
8. Mark the stitch line 1/8 in from each side edge. Punch both layers (and the loop ends) with the 3 mm chisel and saddle stitch each side from the fold up to the opening. Lock at both ends.
9. Sand and burnish the side edges. Slip the tag in from the top, fold the flap down and snap it to the stud.
10. Thread the split ring through the loop.

Pattern Terms and Notes

AirTag Key Fob

HOW TO READ THE PATTERN PAGES

- Solid black line = cut line. Red dashed line = stitch line. Open circles = punched holes.
- Blue numbers are finished dimensions. Add nothing unless a page says so.
- Trace onto card stock or thin chipboard, cut it out, and keep it as a permanent template.

NOTES FOR THIS PATTERN

- The side seams carry the pull of the ring. Go back four holes at the loop when you lock the thread.
- The tag sits in the bottom of the pouch. If the window is off-center, trim the window, not the tag.
- Leather stretches. The pouch will loosen slightly; the window stays smaller than the tag.
- Cut a paper or card stock version first and check every fit before cutting leather. Leather weights and book sizes vary; adjust the template, not the leather.
- Dimensions were compiled from published standards and commercial equivalents (listed on page 2) and checked against the geometry of each assembly. Test-cut the template in paper before leather.

TERMS OF USE

- Make as many items from this pattern as you like, for yourself, as gifts, or to sell.
- Do not redistribute, resell or share this PDF file or its pages, in print or digital form, including by uploading it to another site.
- Do not claim the pattern as your own. Credit Marcellino NY if you post photos of your work.
- The pattern is provided as is. Marcellino NY is not responsible for materials lost to cutting or for injury from tools.

(c) Marcellino NY. All rights reserved.

More patterns and build guides: marcellinony.com/the-maker/